



**DIRECT BURIED POST AND FOOTING DETAIL
FOR SMALL SIGN ASSEMBLIES**

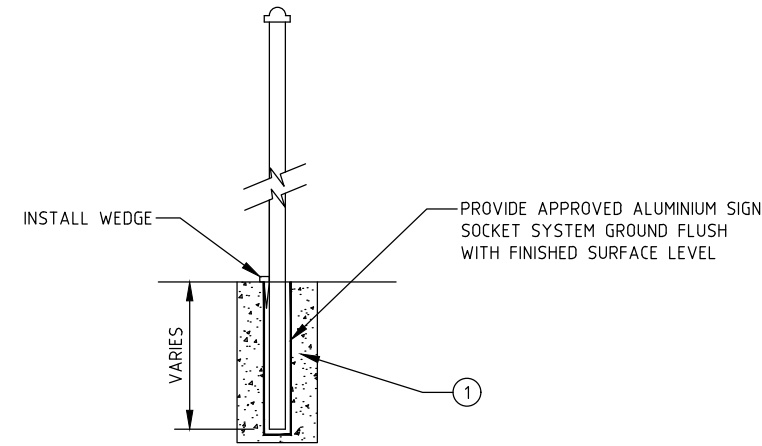

**LOW MAINTENANCE ALUMINIUM
GROUND SOCKET SYSTEM**

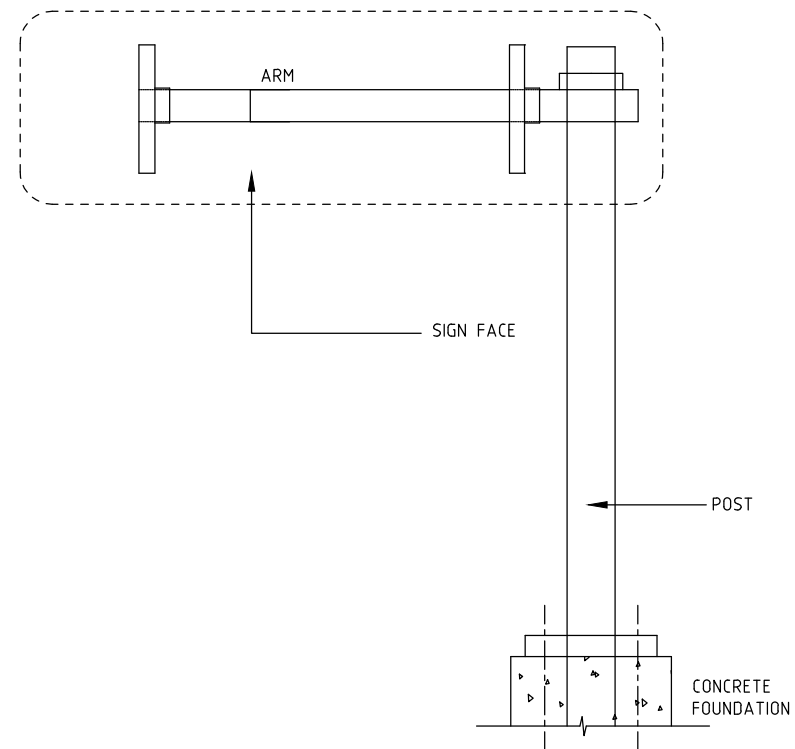

TYPICAL MODULAR SIGN STRUCTURE

(SPECIFIC DESIGN REQUIRED BY PRACTICING
STRUCTURAL ENGINEER)
NOTE: STRUCTURES SHOULD BE LOCATED OUTSIDE
THE CLEAR ZONE OR WITH THE APPROVAL OF THE
ROAD AUTHORITY BEHIND A SAFETY BARRIER

NOTES

- ① REFER ACTSD-3630 FOR POST AND FOOTING DETAILS.
- 2 ALL DIMENSIONS SHOWN ARE IN mm UNLESS SHOWN OTHERWISE.
- 3 REFER CANBERRA CENTRAL DESIGN MANUAL REQUIREMENTS FOR SIGN POST AND FOOTING REQUIREMENTS WITHIN THE CITY AREA.
- 4 FRANGIBLE POSTS: LARGE POSTS THAT ARE NOT CONSIDERED FRANGIBLE SHALL BE LOCATED 1.0m MINIMUM BEHIND SAFETY BARRIERS OR OUTSIDE OF THE CLEAR ZONE (MAX LATERAL SIGN OFFSET APPLICABLE). WHERE THESE PROVISIONS CANNOT BE MET FRANGIBLE POSTS SHALL BE USED. REFER ACTSD-3630 FOR POSTS CONSIDERED FRANGIBLE.



**ENDORSED SIGN
SYSTEMS**

Authorised: *[Signature]*

Latest Revision Details

Rev	Amendment	Date
0	BASED ON DRG DS9-12	19-12-18

Drawing No.	Revision
ACTSD-3602	0