

## ROAD PAVEMENT | STATE | STATE


RISING DRIVEWAY WITH PATH AT PROPERTY LINE

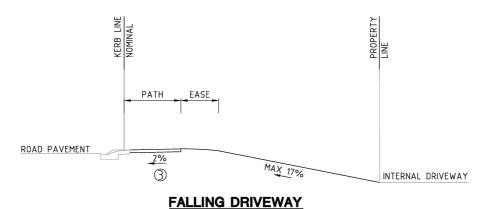

**WITH PATH AT KERB** 

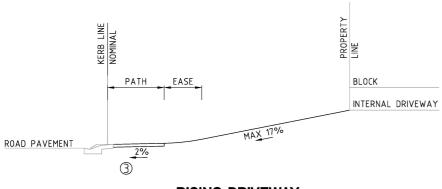


RISING DRIVEWAY
WITH PATH AT KERB

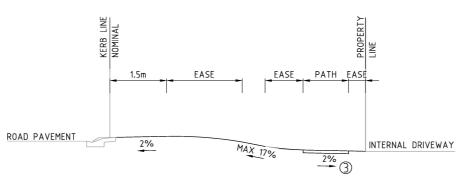


FALLING DRIVEWAY WITH PATH AT PROPERTY LINE

## **LONGITUDINAL SECTIONS**

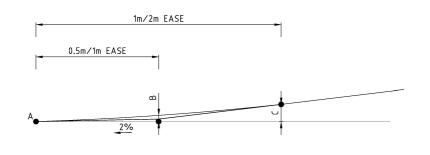

1m EASE RISING

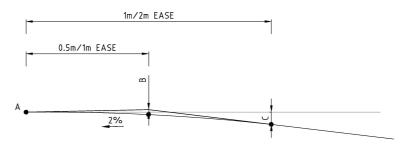

1m EASE FALLING

## NOTES:

- 1. REFER TO DRAWING ACTSD-0000 FOR GENERAL NOTES.
- 2. REFER TO DRAWING ACTSD-0701 FOR GENERAL DRIVEWAY NOTES.
- 3. PATH CROSSFALL TO BE MIN 2% AND 4% MAX EXCEPT ON PATHS ON ACCESSIBLE PEDESTRIAN ROUTES WHERE MAX CROSSFALL IS 2.5%.

## TABLE 1: LEVELS FOR 1 AND 2m VERTICAL CURVES

		1m EASE									
		DRIVEWAY GRADES (%)									
			4	5	6	7	8	9	10	11	12
후	(mm)	Α	00	00	00	00	00	00	00	00	00
RISING	DIMENSION (1	В	10	10	15	15	15	20	20	20	25
ന്നു ത		С	30	35	40	45	50	55	60	65	70
ФП	ā	Α	00	00	00	00	00	00	00	00	00
ALLING	VERTICAL	В	10	10	15	15	15	20	20	20	25
FALLING	VER	С	30	35	40	45	50	55	60	65	70

		2m EASE									
		DRIVEWAY GRADES (%)									
			12	13	14	15	16	17			
호피	DIMENSION (mm)	Α	00	00	00	00	00	00			
RISING		D	45	50	50	50	55	55			
ਕ ਰ		Е	140	150	160	170	180	190			
I 🗢 Ш		Α	00	00	00	00	00	00			
ALLIN	VERTICAL	D	45	50	50	50	55	55			
FALI GR/		E	140	150	160	170	180	190			

