

(VARIATIONS OF 100mm TO SUIT MANUFACTURERS TEMPLATE MAY BE ACCEPTABLE)

1.0m (1.2m MAX)

ANGLE CARPARK MARKING

10


PARALLEL CARPARK MARKING

10

_P4


SYMBOL OF ACCESS FOR PAVEMENTS

CAD CODE: WB-ACCESS, COLOR: WHITE ON ULTRAMARINE BLUE

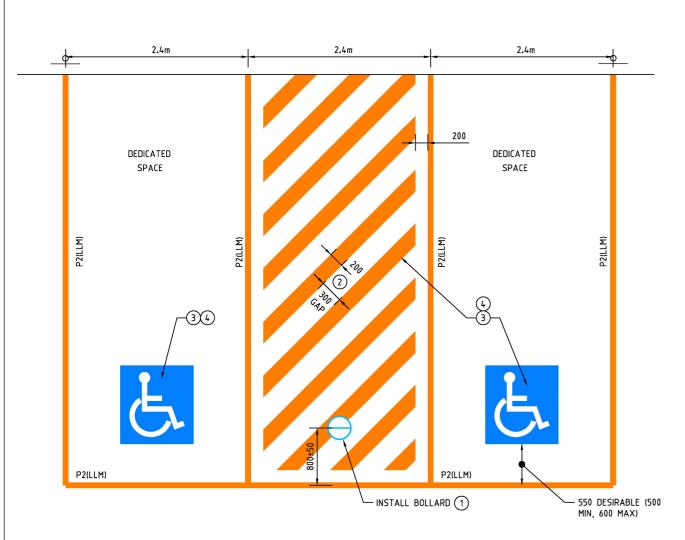


TYPICAL ARRANGEMENT 90 PARKING

(FOR ANGLED ACCESSIBLE PARKING BAYS REFER (6))




LETTERING - 300 HIGH IN WHITE (PAINT) NOTE: INDIVIDUAL BAY LINES SHOULD NOT BE MARKED

MOTORCYCLE PARKING MARKING



TAXI RANK MARKING

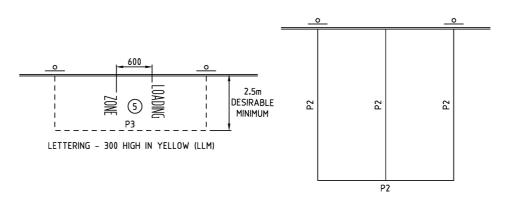

LOADING ZONE / PERMIT ZONE MARKING

NOTES:

- CORE ASPHALTIC CONCRETE PAVEMENT AND INSTALL APPROVED SLEEVED 1.3m(-0/+0.05) EXPOSED HEIGHT, 76.1 OD STEEL BOLLARD. THE BOLLARD SHALL BE POWDER COATED 'HAZARD' YELLOW. THE CONTRACTOR SHALL APPLY CLASS 400 REFLECTIVE TAPE TO THE FULL BOLLARD CIRCUMFERENCE 100mm DEEP BAND OF WHITE TAPE ABOVE 100mm DEEP BAND OF RED TAPE. APPLY 100mm DEEP BAND OF WHITE TAPE BELOW RED TAPE.
- 2) APPLY 200mm WIDE YELLOW PAINTED CHEVRONS WITH 300mm GAP BETWEEN BARS.
- 3 APPLY AN APPROVED NON SLIP AGGREGATE AND GLASS BEAD MIX TO CHEVRON AND ACCESS SYMBOL MARKINGS.
- (4) CHEVRONS AND ACCESS SYMBOL MARKINGS SHALL BE IN ACCORDANCE WITH AS2890.6 (CURRENT EDITION).
- (5) UNLESS APPROVED OTHERWISE ALL LETTERING SHALL BE IN ACCORDANCE WITH AS1742.2
- ANGLED ACCESSIBLE PARKING BAYS SHOULD BE AVOIDED, BUT WHEN NECESSARY SHALL BE DESIGNED TO THE APPROVAL OF THE ROAD AUTHORITY.
- PAVEMENT MESSAGE MAY BE MARKED IN MULTIPLE LINES
 OF TEXT WHERE SPACE IS LIMITED.
 FOR EXAMPLE:
 OR MOTOR

MOTORCYCLE CYCLE
PARKING PARKING

- 8 MOTORCYCLE SPACES SHOULD BE LOCATED IN AREAS OF GENTLE GRADES IN BOTH DIRECTIONS.
- 9 ALL DIMENSIONS SHOWN ARE IN mm UNLESS SHOWN OTHERWISE.
- (10) REFER TO AS2890.1 AND 2890.5 FOR PARKING SPACE



PAVEMENT MARKINGS PARKING

Authorised: Alakal			
Late	st Revision Details		
0	BASED ON DRG DS9-03	19-12-	-18
Rev	Amendment	Date	
Draw	ving No.	Revision	
	ACTSD-3511	0	