


Area layout example: Local community route along two short sections of existing suburban streets with no path provision for walkers or cyclists



NOTES

- 1 Treatments shown on this drawing are used only on Main and Local Community Routes (MCRs and LCRs) in Retrofit only.
- 2 For details on standard treatments for MCR and LCR wayfinding signage refer to ACT Standard Drawings ACTSD-0570 to -0574 and ACTSD-0590 to -0594 for directional signage layout details
- 3 W6-9 and W8-23 sign assemblies are to be placed 80-100m on all trafficable streets in advance of MCR or LCRs when located on-street.
- 4 Where vehicular traffic on streets used by on-road MCRs or LCRs is in excess of 1,000 vpd or 85th percentile vehicle speeds are in excess of 40km/h yellow and black pavement patches are used adjacent to W6-9 and W8-23 sign assemblies. See ACTSD-3524 for layout details of pavement marking patch.
- 5 For layout details and sizing of on-road pavement symbols for Main and Local Community Routes on streets without paths in Retrofit, refer to ACT Standard Drawings ACTSD-3523.

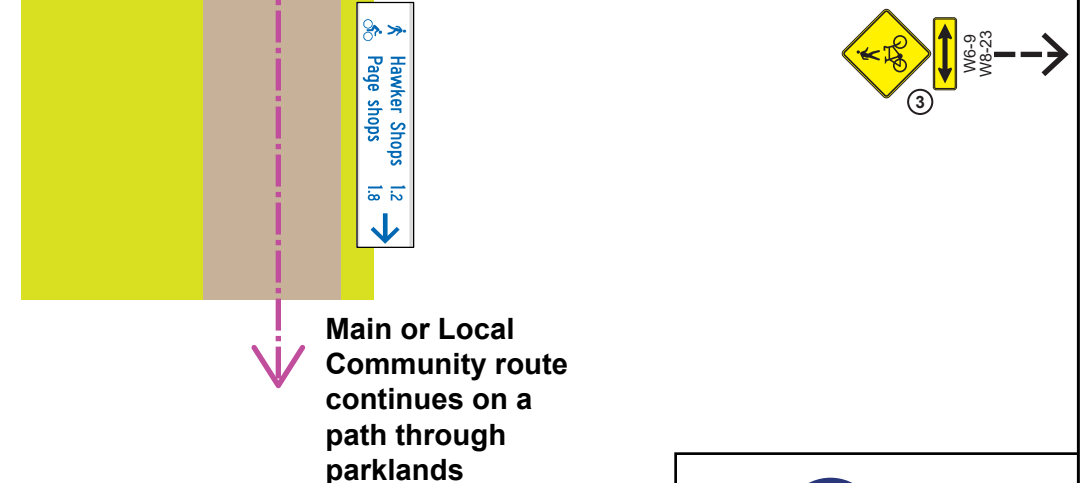

STANDARD DRAWING		
STREETS WITHOUT PATHS RETROFIT – OFFSET JUNCTION CONNECTION – MAIN & LOCAL CRs		
Authorised: <i>[Signature]</i>		
Latest Revision Details:		
0	First issue	28/09/18
Rev	Amendment	Date
Drawing No: ACTSD-0514		Revision: 0