


PLACEMENT NOTES

THE BRAND SHALL ONLY BE INSTALLED ON THE PRINCIPAL COMMUNITY ROUTES. THE PAVEMENT MARKING BRAND MAY BE USED

- ADJACENT TO THE FIRST SIGN AT THE START OF THE PCR
- AT KEY DECISION POINTS THAT REQUIRE ADDITIONAL ADVANCE DIRECTION GUIDANCE SUCH AS SHARP TURNS OR HIGH SPEED TURNS
- AT THE INTERSECTION OF MULTIPLE PCRS
- TO IMPROVE / PROMOTE ROUTE AWARENESS

THE BRAND SHALL NOT BE INSTALLED ON NON-PCR PATHS EVEN IF THE PATH USER IS TURNING ONTO A PCR


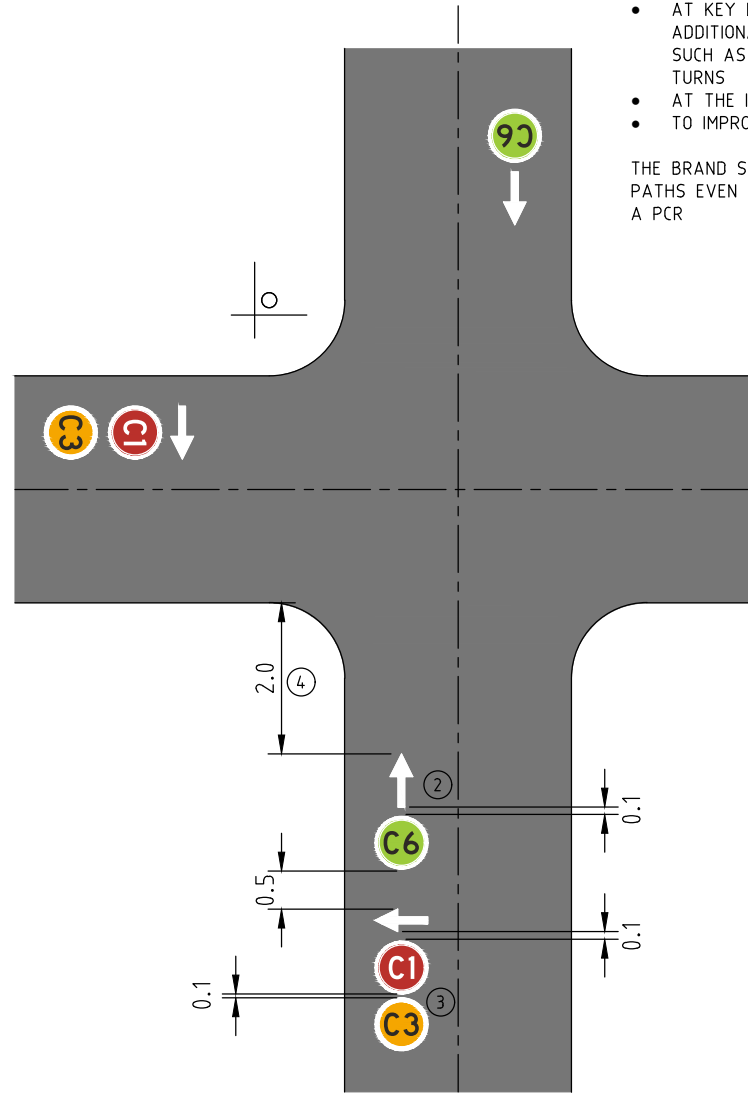


STANDARD BRAND INSTALLATION



Brand Colour Table ⑦				
Swatch	Brand	Route Label ⑪	Brand Colour	Font Colour
[Red]	C1	CITY-GUNGAHLIN	R13 Signal Red	White
[Purple]	C2	CITY-QUEANBEYAN	Pantone 515 C	Black
[Yellow]	C3	CITY-BELCONNEN	Y14 Golden Yellow	Black
[Blue]	C4	CITY-TUGGERANONG	B21 Ultramarine	White
[Magenta]	C5	BELCONNEN-TUGGERANONG	Pantone 240 C	White
[Green]	C6	ANU-DICKSON	Pantone 2299 C	Black
[Black]	C7	BELCONNEN-GUNGAHLIN	N61 Black	White
[Brown]	C8	CITY-LOOP	R52 Terracotta	White
[Orange]	C9	GUNGAHLIN-AIRPORT	X15 Orange	White

NOTES


- ① TEXT SHOULD BE 300mm HIGH LETTERING SERIES D AS1744:2015, HEIGHT MAY BE REDUCED FOR THREE CHARACTER PCR BRANDS
- ② WHERE MULTIPLE BRANDS ARE SHOWN WITH MULTIPLE ARROWS THE STRAIGHT ASSEMBLY SHALL BE AT THE TOP OF THE STACK
- ③ MULTIPLE BRANDS WITH A SINGLE ARROW SHOULD BE SHOWN IN NUMERICAL ORDER
- ④ THE BRAND IS TO BE INSTALLED 2.0m BACK ON THE APPROACH SIDE OF INTERSECTION. ONLY IN RETROFIT OR AREAS WITH LIMITED SPACE THE BRAND MAY BE PLACED CLOSER THAN 2.0m OR IN/AFTER THE INTERSECTION OR TURN. THE ARROW SHOULD BE INSTALLED ABOVE THE BRAND, AN ARROW MAY BE INSTALLED AT THE SIDE OF THE BRAND IN RETROFIT
- ⑤ ARROW SHALL BE WHITE, OR YELLOW ON LIGHT BACKGROUND SURFACES
- ⑥ THE BRAND SHALL ALWAYS HAVE A 50mm WHITE BORDER
- ⑦ REFER TO THE COLOUR TABLE FOR FONT COLOUR
- ⑧ ALL MATERIALS TO BE LONG LIFE MATERIAL
- ⑨ ALL DIMENSIONS ARE IN mm UNLESS SHOWN OTHERWISE
- ⑩ REFER MIS11, TABLE 11-11 FOR REFLECTIVITY AND FRICTION REQUIREMENTS
- ⑪ FURTHER INFORMATION ON PCR LABELS ARE AVAILBLE THROUGH THE ATIPT - ACTIVE TRAVEL INFRASTRUCTURE PRACTITIONER TOOL (www.activeinfrastructure.nef.au)

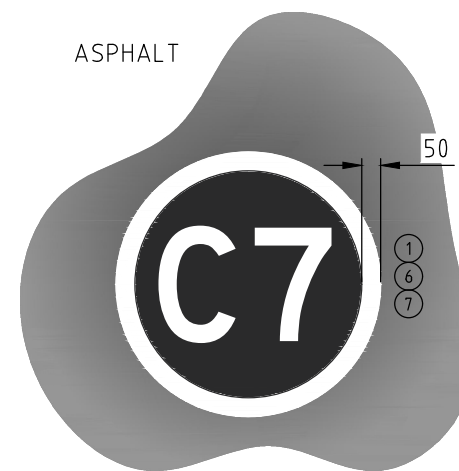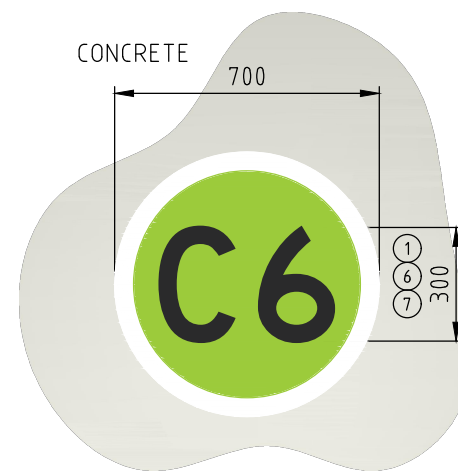


BRAND PAVEMENT MARKING DIMENSIONS

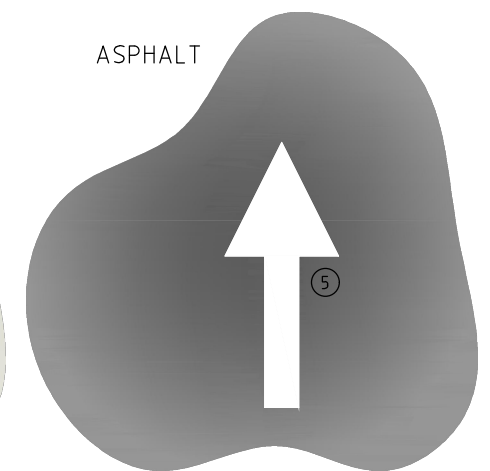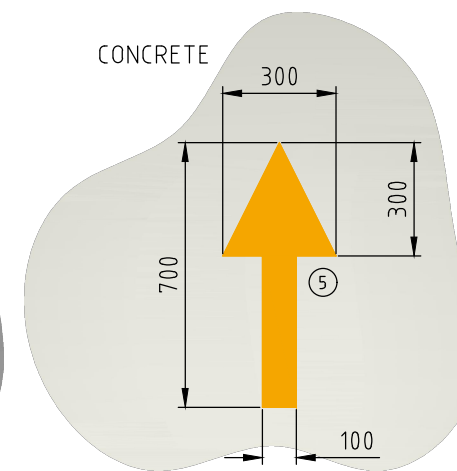


ARROW PAVEMENT MARKING DIMENSIONS

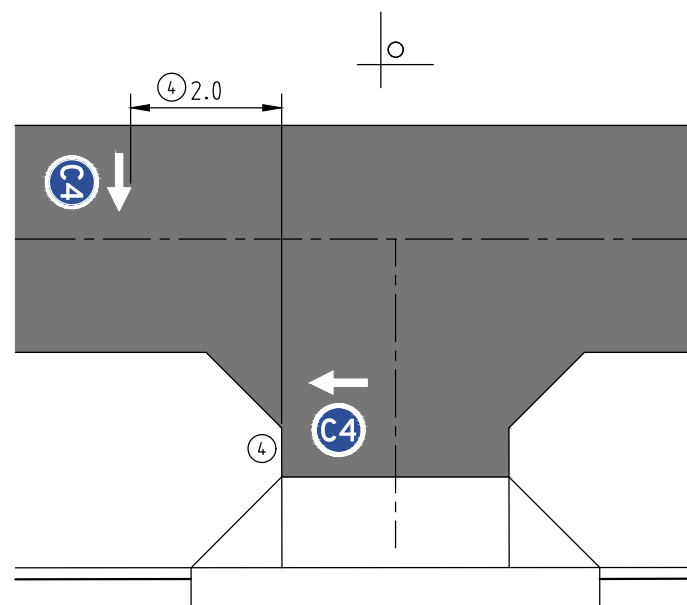

RETROFIT EXAMPLE 1
TURN AT SHORT
CONNECTING PATH

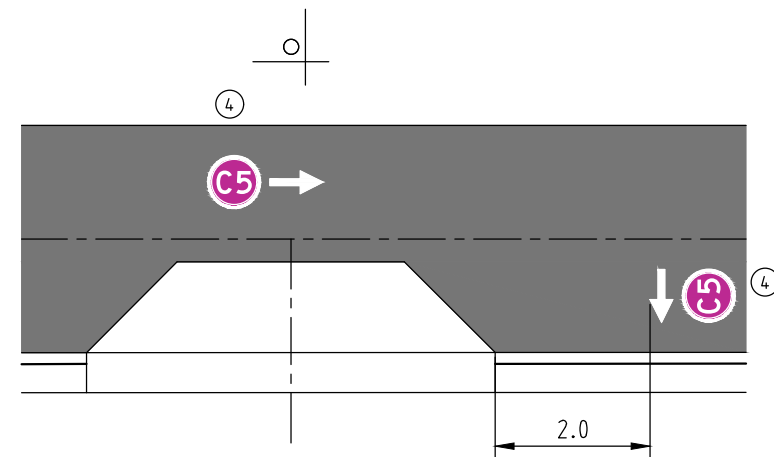

RETROFIT EXAMPLE 2
TURN AT KERB RAMP WITH PATH
DIRECTLY BEHIND THE KERB

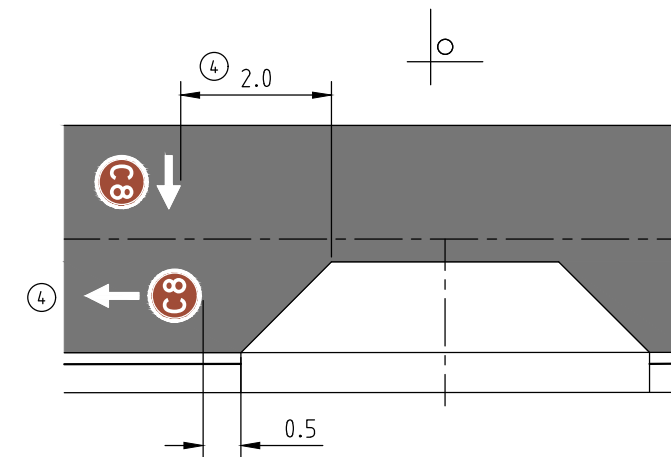

RETROFIT EXAMPLE 3
TURN AT KERB RAMP WITH PATH
DIRECTLY BEHIND THE KERB

**BRAND INSTALLATION EXAMPLES
RETROFIT ONLY**

ACT
Government

STANDARD DRAWING

**PRINCIPAL COMMUNITY
ROUTES - ROUTE
BRANDING AND ROUTE
LABEL DETAILS**

Authorised:

Latest Revision Details	
0	FIRST ISSUE
21/12/20	Date
Rev	Amendment
Drawing No.	Revision
ACTSD-0575	0