


ELEVATION
1:20

NB: TOWN PARK INFORMATION SIGN SIMILAR CONSTRUCTION, EXCEPT:
1. DELETE FIN;
2. ALLOW 40mm FRAME REVEAL AS SHOWN; AND
3. 900 UPPER PANEL SIZE

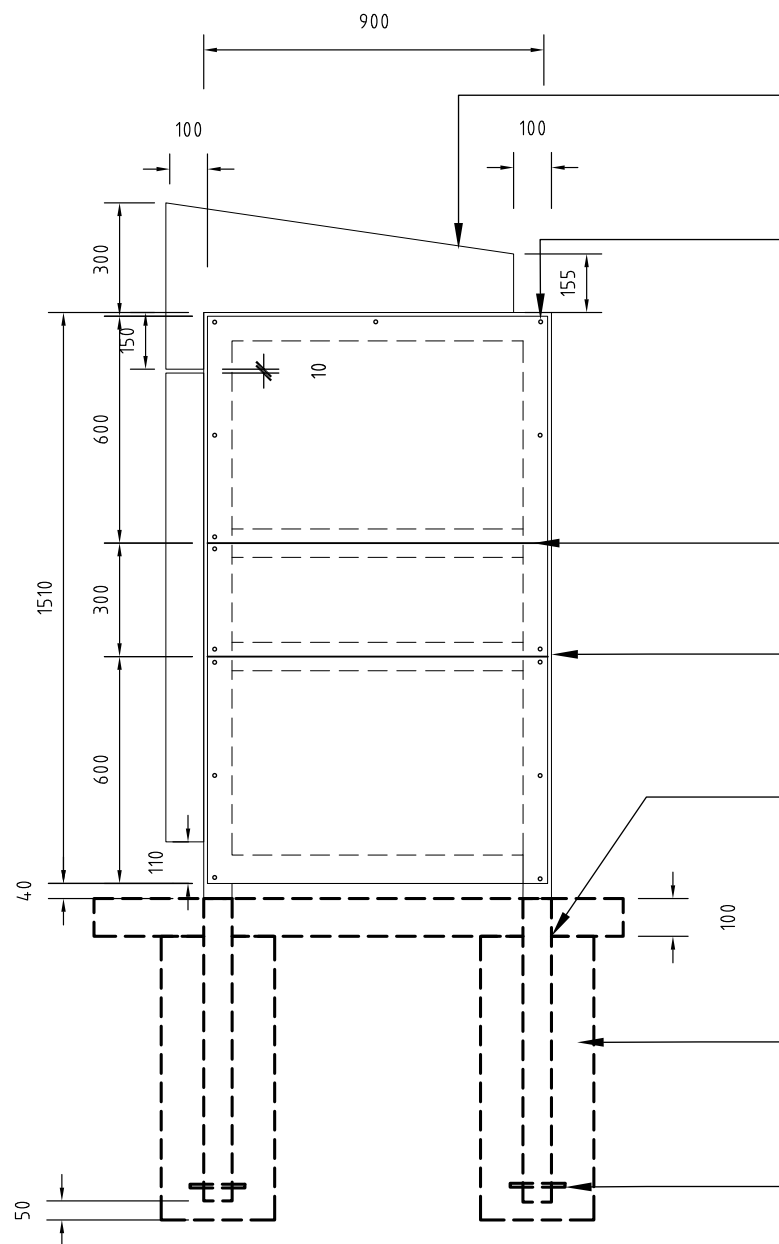

ELEVATION
1:20

ATTACH FIN PLATE TO FRAME BY 100 ON 100 OFF STITCH WELD. CONTINUOUS BODY FILL BEFORE PAINTING TO HIDE WELDS

VANDAL PROOF 'SNAKE EYES' STAINLESS 10X16X30MM (#10,1-1/4") SCREWS AT 300 CENTRES. PAINT HEADS TO MATCH PANEL COLOUR. SCREWS RECESSED INTO THE PANEL SO HEAD IS FLUSH WITH SURFACE. ALL HOLES AND RECESSES ARE TO BE MADE PRIOR TO PAINTING.

FABRICATE FRAME FROM 75 SHS 3.0 DURAGAL

FRAME TO EXCEED SIGN FACE DIMENSIONS BY 10mm ON ALL SIDES


FINISH FOOTINGS 100mm BELOW GROUND LEVEL IN ALL LOCATIONS

GRASSED AREAS ONLY - CONSTRUCT 100mm THICK 20MPa CONCRETE MOWING STRIP

FOOTING 300 DIA X 750 DEEP (MIN) 20 MPa CONCRETE INTO UNDISTURBED NATURAL GROUND

10mm DIA GALV LOCKING PIN


SIGNS ARE TO BE INSTALLED TRUE AND PLUM WITH POSTS VERTICAL AND SIGN FACES HORIZONTAL AND SQUARE.

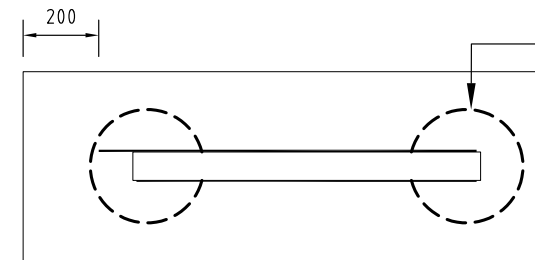

PLAN
1:20

FOOTINGS SHOWN DASHED

GRASSED AREAS ONLY - 1400 X 500 X 100mm THICK MOWING STRIP

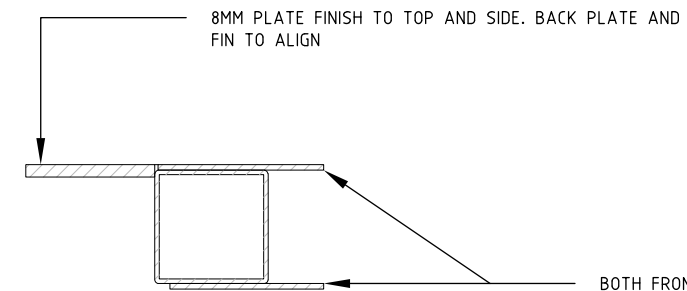

DETAIL
1:5

8MM PLATE FINISH TO TOP AND SIDE. BACK PLATE AND FIN TO ALIGN

BOTH FRONT AND BACK PANELS 5MM ALUMINIUM FLAT SHEET M.F. 5052 H34 TEMPER

SIGNAGE
STANDARD DETAIL
SHEET 5

Authorised: 

Latest Revision Details

Rev	Amendment	Date
0	FIRST ISSUE	25-2-19

Drawing No. **ACTSD-2513** Revision **0**